


## Electrical Formulas

### General Formulas

The following formula wheel can be used for all direct current circuits and alternating current circuits with unity power factor.

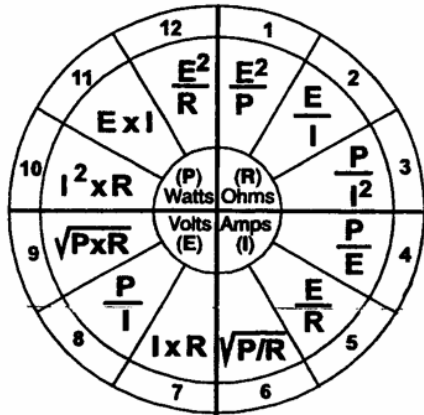

### Voltage Drop Formulas

$$\text{Voltage Drop (1}\varnothing\text{)} = \frac{2 \times L \times K \times I}{\text{CM}}$$

$$\text{Voltage Drop (3}\varnothing\text{)} = \frac{1.732 \times L \times K \times I}{\text{CM}}$$

K = direct current resistance for a 1,000 circular mil conductor 1,000 feet long operating at 75°C..

K = 12.9 ohms for copper

K = 21.2 ohms for aluminum

(From NEC - Chapter 9, Table 8)

L = One way length of circuit in feet

I = Current in conductor in amperes

$$\text{Voltage Drop (1}\varnothing\text{)} = R \times I$$

R = Resistance of both conductors

$$\text{Voltage Drop (3}\varnothing\text{)} = R \times I \times 1.732$$

R = Resistance of one conductor


**Note 1** - Use copper conductors for all problems, unless otherwise specified.

**Note 2** - One horse power is equal to 746 watts.

**Note 3** - Power factor (P.F.) =  $\cos \theta = R/Z$ , Z = Impedance.

**Note 4** - Efficiency = Output/Input

### DELTA



$$V_L = V \text{ Line} = \text{Source Voltage}$$

$$V_P = V \text{ Phase} = \text{Phase Voltage}$$

$$V_L = V_P$$

$$I_L = I \text{ Line} = \text{Line Current}$$


$$I_P = I \text{ Phase} = \text{Phase Current}$$

$$I_L = I_P \times 1.732$$

$$I_P = I_L / 1.732$$

$$\begin{aligned} \text{Power} = W &= \sqrt{3} \times V_L I_L \cos \theta \\ &= 3 I_P^2 R \\ &= 3 V_P I_P \cos \theta \end{aligned}$$

### WYE

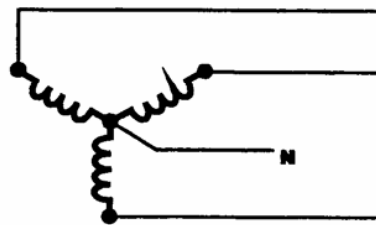

$$V_L = V \text{ Line} = \text{Source Voltage}$$

$$V_P = V \text{ Phase} = \text{Phase Voltage}$$

$$V_L = V_P \times 1.732$$

$$I_L = I \text{ Line} = \text{Line Current}$$

$$I_P = I \text{ Phase} = \text{Phase Current}$$

$$I_L = I_P$$

$$\begin{aligned} \text{Power} = W &= \sqrt{3} \times V_L I_L \cos \theta \\ &= 3 I_P^2 R \\ &= 3 V_P I_P \cos \theta \end{aligned}$$

$$\text{Power Factor} = \frac{\text{True Power}}{\text{Apparent Power}}$$